

Technical sheet :

100 SEC S3




Capacities		Metric
Working height maximum (indoor)	h21	9.96 m
Working height maximum (outdoor)	h21	7.79 m
Platform height maximum (indoor)	h7	7.96 m
Platform height maximum (outdoor)	h7	5.79 m
Platform capacity	Q	227 kg
Lift capacity - Extension deck		113 kg
Number of people (inside / outside)		2 / 1
Weight and dimensions		
Platform weight*		2145 kg
Platform dimensions (length x width)	lp / ep	2.27 m x 0.81 m
Platform dimensions with extension (length)		3.18 m
Overall width	b1	0.81 m
Overall length	l1	2.44 m
Overall height	h17	2.32 m
Overall length (stowed)	l9	2.44 m
Overall height (stowed)	h18	1.94 m
External turning radius	Wa3	2.13 m
Ground clearance	m4	0.12 m
Ground clearance with pothole guards deployed	m6	0.02 m
Ground clearance with pothole guards folded	m2	0.12 m
Wheelbase	y	1.85 m
Performances		
Drive speed - stowed		3.20 km/h
Drive speed - raised		0.80 km/h
Raise speed / Lower speed		44 s / 33 s
Gradeability		25 %
Permissible leveling (front / side)		3 ° / 1.50 °
Wheels		
Tyres type		Non marking
Dimensions of front wheels / rear wheels		0,38x0,13m - 0,38x0,13m
Drive wheels (front / rear)		2 / 0
Steering wheels (front / rear)		2 / 0
Braking wheels (front / rear)		2 / 2
Engine/Battery		
Battery / Batteries capacity		6 V / 225 Ah
Integrated charger (V / A)		24 V / 27 A
Miscellaneous		
Ground Pressure		8.78 dan/cm2
Hydraulic tank capacity		17 l
Noise to environment (LwA)		< 70 dB
Vibration on hands/arms		< 2.50 m/s²
Standards compliance		
This machine is in compliance with:		European directives: 2006/42/EC- Machinery (revised EN280:2013) - 2004/108/EC (EMC) - 2006/95/EC (Low voltage)


*Varies according to options and standards of the country to which the machine is delivered

100 SEC S3 - Load chart

Load Chart metric

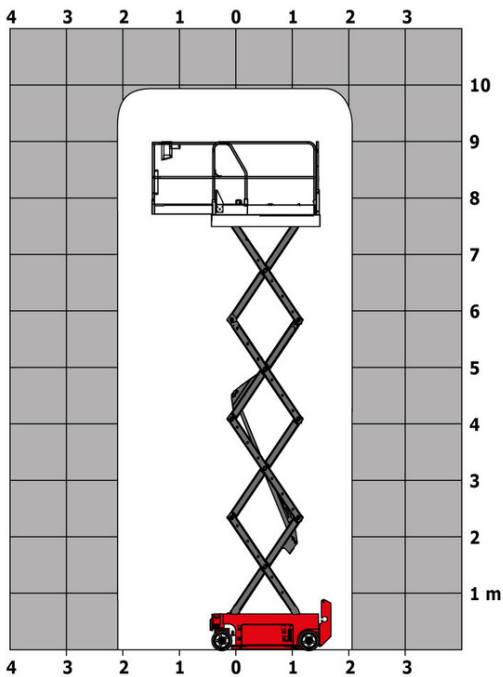

100 SEC S3 - Dimensional drawing

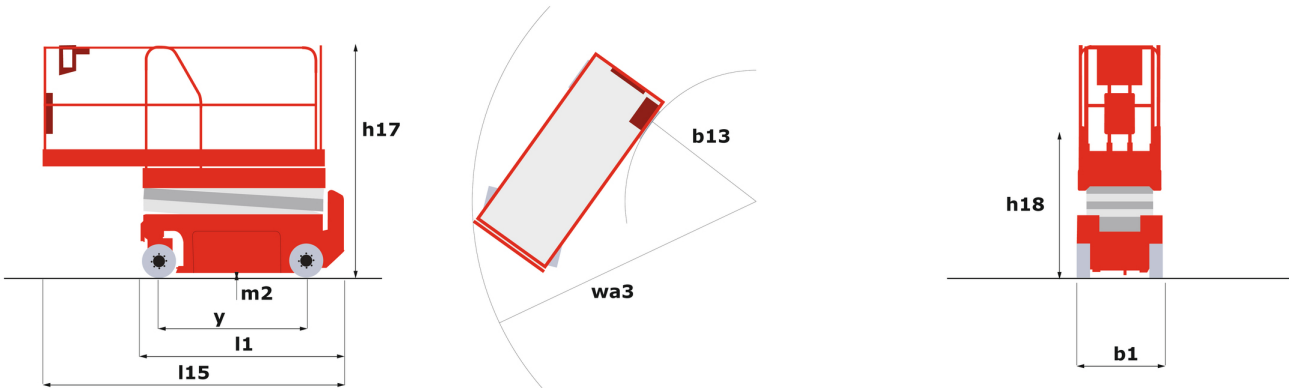

Equipment

Standard

2 swing out component trays
220V predisposition in the platform
Audible alarm and illuminated indicator lamp (leveling, overload, lowering)
Battery charge indicator lamp
CAN bus technology
Descent alarm
Dynamic hydraulic braking on front wheels
Emergency stop
Folding rails with half height swing gate
Horn in the platform
Hour meter
Integrated diagnostic assistance
Load management according to environment (indoor/outdoor)
Manual emergency lowering
Multi-voltage integrated charger
Non-marking rubber tyres
Pothole protection with automatic operation
Rear wheel multiple disc brakes
Side and rear forklift pockets

Optional

Beep on every movement
Biodegradable oil
Cold weather protection oil
Safety harness



Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes