


Technical sheet :

MC 18-2 ST5



Technical characteristics			Metric	Imperial
1.1	Manufacturer		Manitou	Manitou
1.2	Model Name		MC 18-2 ST5	MC 18-2 ST5
1.3	Power source		Diesel	Diesel
1.4	Operator type		Sitting	Sitting
1.5	Max. capacity	Q	1800 kg	3968 lb
1.6	Load centre of gravity	c	500 mm	20 in
1.8	Load distance, centre of drive axle to fork	x	616 mm	24 in
1.9	Wheelbase	y	1900 mm	75 in
Weight				
2.1	Service weight		3440 kg	7584 lb
2.2	Weight on front axle (laden) / rear axle (laden)		4600 kg / 640 kg	10141 lb / 1411 lb
2.3	Weight on front axle (Unladen) / rear axle (Unladen)		1590 kg / 1850 kg	3505 lb / 4079 lb
Wheels				
3.1	Tyres type		Pneumatic	Pneumatic
3.2	Dimensions of front wheels		12.5/80 - 18/12 SL R4	12.5/80 - 18/12 SL R4
3.3	Dimensions of rear wheels		7.00-12/12 ED PLUS	7.00-12/12 ED PLUS
3.5	Number of front wheels / rear wheels		2 / 2	2 / 2
3.5.2	Number of drive wheels		2	2
3.6	Front wheel gauge	b10	1159 mm	46 in
3.7	Rear wheel gauge	b11	1112 mm	44 in
Dimensions				
4.1	Tilt of Mast Forward (deg) / Backward (deg)	a / β	12 / 10	12 / 10
4.7	Height of overhead guard (cabin) / Overall height of low overhead guard (Buggie version)	h6 / h6*	2155 mm / 1990 mm	85 in / 78 in
4.8	Seat height/stand height	h7	1034 mm	41 in
4.19	Overall length	l1	4100 mm	161 in
4.20	Length to face of forks	l2	2950 mm	116 in
4.21	Overall width	b1	1450 mm	57 in
4.22	Forks section x width x length	s / e / l	35 mm x 100 mm / 1150 mm	1 in x 4 in / 45 in
4.23	Fork carriage ISO 2328 (class/form) A/B		FEM 2A	FEM 2A
4.24	Fork carriage width	b3	1260 mm	50 in
4.31	Ground clearance below mast	m1	300 mm	12 in
4.32	Ground clearance at centre of wheelbase	m2	320 mm	13 in
4.35	Turning radius	Wa	2585 mm	102 in
Performances				
5.1	Travel speed (laden / unladen)		12 km/h / 23.50 km/h	7 mi/h / 15 mi/h
5.2	Lifting speed (laden / unladen)		0.44 m/s / 0.44 m/s	1 ft/s / 1 ft/s
5.3	Lowering speed (laden / unladen)		0.40 m/s / 0.40 m/s	1 ft/s / 1 ft/s
5.5	Drawbar pull (Laden)		1000 daN	1000 daN
5.7	Gradeability (laden)		19 %	19 %
5.10	Service brake		Hydraulic brakes by loss of pressure	Hydraulic brakes by loss of pressure
Engine				
7.1	Engine brand / model / nom		Kubota / D1803 CR E5B / Stage V	Kubota / D1803 CR E5B / Stage V
7.2	Engine power according to ISO 1585		27 kW	27 kW
7.3	Rated speed		2700 rpm	2700 rpm
7.4	Number of cylinders / Capacity of cylinders		3 - 1826 cm³	3 - 111 in³
Miscellaneous				
8.1	Type of drive control		Electronic	Electronic
8.2	Working hydraulic pressure for attachments		160 bar	2321 PSI
8.3	Oil flow rate for attachments		31 l/min	31 l/min

MC 18-2 ST5 - Dimensional drawing

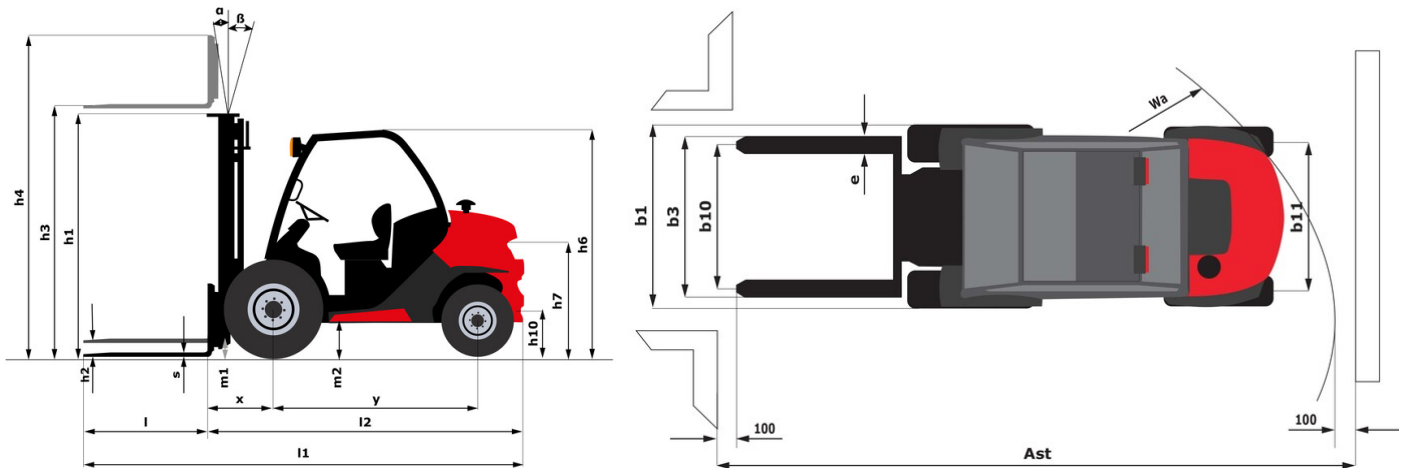

Characteristics of masts and residual capacities

Duplex with total visibility		FVD 33	FVD 37	FVD 40	FVD 45
h2 - Free lift	mm	85	85	85	85
h1 - Height mast lowered *	mm	2348	2608	2798	3048
h3 - Lifting Height	mm	3300	3700	4000	4500
h4 - Height mast extended *	mm	4018	4428	4768	5268
α / β - Mast inclination (front / rear)	°	12 / 10	12 / 10	12 / 10	12 / 10
Residual capacity without attachment (Industrial load chart)	kg	1800	1800		1100
Residual capacity with hooked-on side shift (Industrial load chart)	kg	1800	1800		1100
Height at max capacity	mm	3300	3700		3600
Height at max capacity with hooked-on sideshift	mm	3300	3700		3600

Free lift triplex		FLT 37	FLT 43	FLT 47	FLT 55
h2 - Free lift	mm	1305	1505	1655	1915
h1 - Height mast lowered *	mm	1998	2198	2348	2608
h3 - Lifting Height	mm	3700	4300	4700	5500
h4 - Height mast extended *	mm	4453	5053	5453	6253
α / β - Mast inclination (front / rear)	°	12 / 10	12 / 10	12 / 10	6 / 6
Residual capacity without attachment (Industrial load chart)	kg	1600	1000	600	
Residual capacity with hooked-on side shift (Industrial load chart)	kg	1550	1000	600	
Height at max capacity	mm	3400	3400	3400	
Height at max capacity with hooked-on sideshift	mm	3300	3400	3400	

Triplex with total visibility		FVT 33
h2 - Free lift	mm	135
h1 - Height mast lowered *	mm	1888
h3 - Lifting Height	mm	3300
h4 - Height mast extended *	mm	4048
α / β - Mast inclination (front / rear)	°	12 / 10
Residual capacity without attachment (Industrial load chart)	kg	1800
Residual capacity with hooked-on side shift (Industrial load chart)	kg	1800
Height at max capacity	mm	3300
Height at max capacity with hooked-on sideshift	mm	3300



Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes