Technical sheet:


MLA 4-50 H





	MLA 4-50 H Creat	MLA 4-50 H Created on July 21, 2022 at 12:27:17 PM UTC	
Capacities		Metric	
Static tipping load with bucket (straight)		1540 kg	
Static tipping load with bucket (full turn)		1355 kg	
Static tipping load with forks (straight)		1175 kg	
Static tipping load with forks (full turn)		1030 kg	
Max. height of bucket pivot point	h35	2836 mm	
Weight and dimensions			
Unladen weight (with forks) with 4-post canopy		2316 kg	
Wheelbase	у	1650 mm	
Overall cab width	b4	991 mm	
Overall height with 4 posts canopy	h38	2258 mm	
Dump reach - Full height	r6	485 mm	
Hood Height	h40	1405 mm	
Overall Operating Height - Fully Raised	h27	3636 mm	
Articulation angle	a19	45 °	
Maximum oscillation angle	w.,,	10 °	
Overall length with bucket	116	4279 mm	
Overall width less bucket	b1	1100 mm	
	12	3583 mm	
Overall length - Less Bucket			
Rear overhang Description of the state of t	c6	1120 mm	
Dump angle - Fully raised	a5	46 °	
Dump Height - Fully Raised	h29	2066 mm	
Maximum Rollback Angle - Fully Raised	a4	47 °	
Maximum Rollback Angle at Ground	a13	50 °	
Digging Position	h32	-139 mm	
Ground clearance	m4	320 mm	
Clearance Radius - Front with Bucket	b18	3246 mm	
Clearance Radius - Less bucket	b14	2767 mm	
Ground Plane to Bucket Edge Height	h42	2595 mm	
Tread width (wheel center)	b29	836 mm	
Attachment Pivot Clearance		103 mm	
Height from ground to axle center	m8	214 mm	
Bucket Width	e1	1520 mm	
Front Wheel Center to Pivot Pin	m3	669 mm	
Engine			
Engine brand		Perkins	
Engine model		403J-E17T	
Number of cylinders		3	
I.C. Engine power rating / Power (kW)		48 Hp / 36 kW	
Max. torque / Engine rotation		166 Nm / 1600 rpm	
Engine cooling system		Water	
Transmission			
Transmission type		Hydrostatic	
Number of gears (forward / reverse)		2/2	
Max. travel speed (may vary according to applicable regulations)		20 km/h	
Service brake		Inching Brake	
Hydraulics			
Hydraulic pump type		Gear pump	
Hydraulic flow - Pressure		60 I/min / 207 bar	
High-Flow Option (I/min)		60 l/min	
Tank capacities		00 1/111111	
		50 I	
Hydraulic oil			
Fuel tank		45 I	

MLA 4-50 H - Dimensional drawing

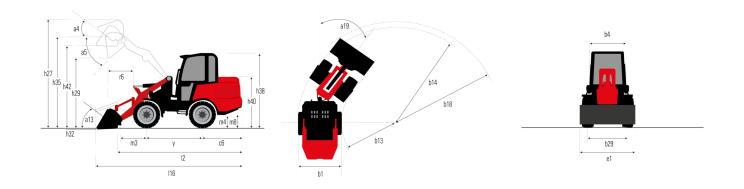





Siège Social 430 rue de l'Aubinière - 44150 Ancenis Cedex - France Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in thisbrochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes